


Branching

iSpring QuizMaker lets you control the order of questions in quizzes depending on students' answers.

To enable branching for a given question:


1. In the Questions pane, select a question you want to set branching for.
2. Specify what to do for each outcome of the question (**Correct**, **Incorrect**, **Try Again**).

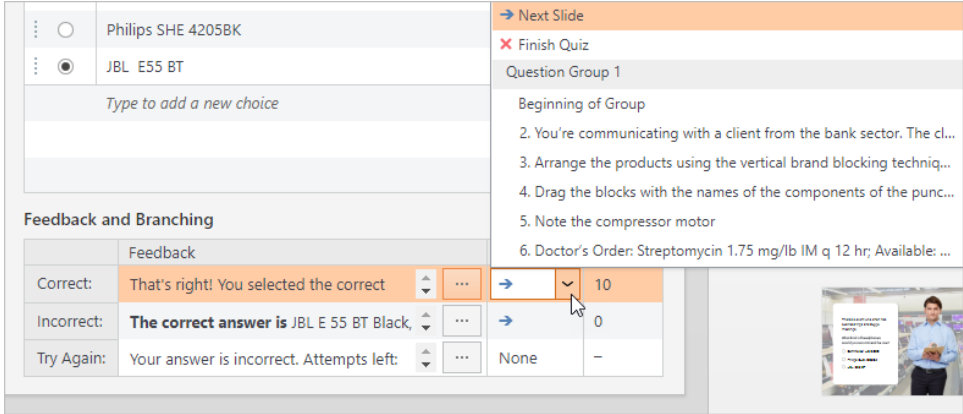

- **Next Slide** - The user will be shown the next slide/question in the quiz.
- **Finish Quiz** - The quiz will be ended, and the user will be taken to the Results screen.
- **Specified Slide** - The user will be taken to the specified slide with a question or additional information.
- **Beginning of Group** - The user will be shown the first question of the group.
- **Random Pool** - If you have enabled randomization for a group, the user will see the first question from a random selection of questions in the group.

Branching by Choice

For Multiple Choice questions, you can set up branching not only based on results, but also individual answer choices. To do this, in the **Slide Options** section, select the **By Choice** option from the **Branching** dropdown.

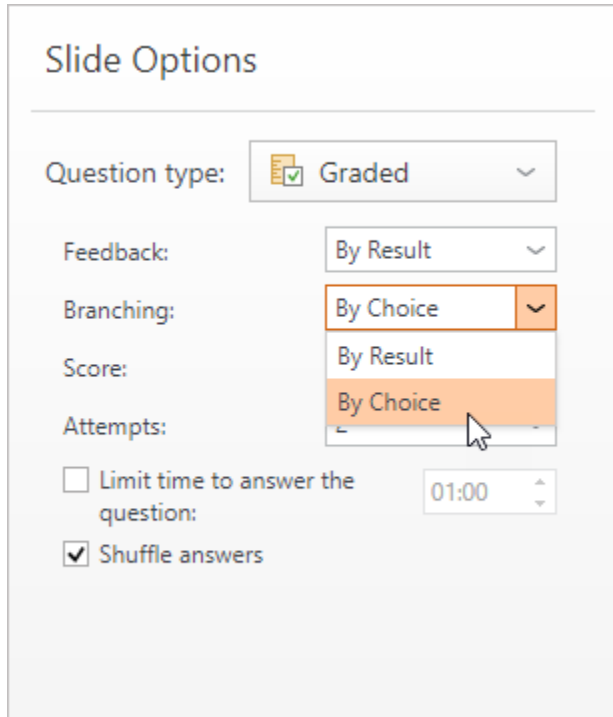

In the **Branching** column next to each answer choice, select an action or slide to branch to after the user answers the question.

Multiple Choice Question

There's a client who often has business trips and Skype meetings.

What kind of headphones would you recommend to use?



Choices

Correct	Choice	Branching
<input type="radio"/>	Sennheiser HD 2.30G	→ [v] ×
<input type="radio"/>	Philips SHE 4205BK	
<input checked="" type="radio"/>	JBL E55 BT	
<i>Type to add a new choice</i>		

Feedback and Branching

Feedback

Slide Options

Question type: Graded

Feedback:

Branching:

Score:

Attempts:

- Next Slide
- × Finish Quiz
- Question Group 1
 - Beginning of Group
 - 2. You're communicating with a client from the bank sector. The cl...
 - 3. Arrange the products using the vertical brand blocking techniq...
 - 4. Drag the blocks with the names of the components of the punc...
 - 5. Note the compressor motor
 - 6. Doctor's Order: Streptomycin 1.75 mg/lb IM q 12 hr; Available: ...